



Threaded Filler Breather Caps

Model BF Series

- Maximum flow rate 35 CFM, 250 GPM@.56 PSI
- Steel shell nickel chrome or black powder coated
- Steel zinc plated fitting base
- 10 or 40 micron foam filtration
- Operating temperature -22°F to +212°F (-30°C to +100°C)
- Compatible with petroleum and mineral base oils

Options Available

- 1/4", 3/8", 1/2", 3/4", 1" NPT threads
- 9/16"-18 thread available


BF-8 & BF-12

BF-16



BF-4 & BF-6

Dimensional Detail

Model	Micron	Pipe Size	Air Flow		A	B	C	D
BF-4	10, 40	1/4"	4	in. mm	1.4" 35	1.9" 47	1" 25	0.7" 18
BF-6	10, 40	3/8", 9/16"-18	4	in. mm	1.4" 35	1.9" 47	1" 25	0.7" 18
BF-8	10, 40	1/2"	35	in. mm	2.6" 67	2.9" 74	1.4" 36	0.9" 24
BF-12	10, 40	3/4"	40	in. mm	2.6" 67	3" 76	1.4" 36	1.1" 27
BF-16	10, 40	1"	40	in. mm	3" 76	3.3" 83	1.7" 43	1.4" 36

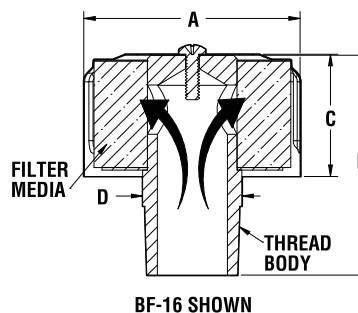

BF Series Performance Graphs

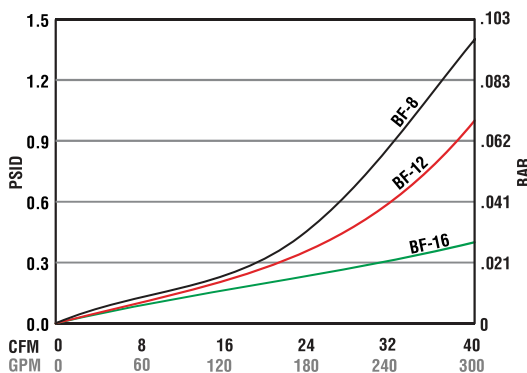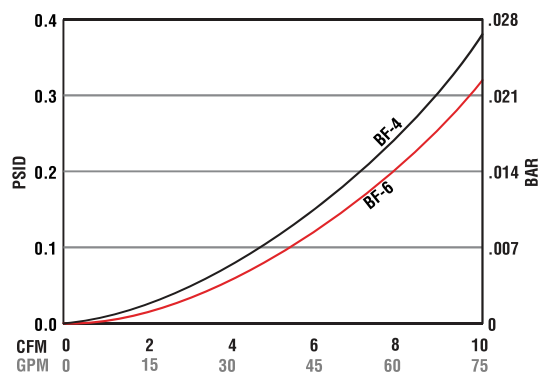

Ordering Code

* — BF — 6 — *

Omit	
BPC	ALL
ISO	BF-16
*AS	Anti-splash

Series	
BF	ALL
BFA	SAE #6

Size
4
6
8
12
16

Options	
DIP	1/2", 3/4", 1"
10M	ALL

See dipstick reference chart page 73b

*Available: BF-8, 12, 16 size